



UNISOL
Membrane Technology




SPIRAL WOUND MEMBRANE ELEMENTS

WIDE RANGE • FDA COMPLIANT • CUSTOMIZED

WIDE RANGE OF SPIRAL WOUND ELEMENTS


To cover the high variety of applications, UNISOL provides the complete spectrum of MF, UF, NF and RO spiral wound elements, the module design stretches from standard elements to fully customized specialty products.

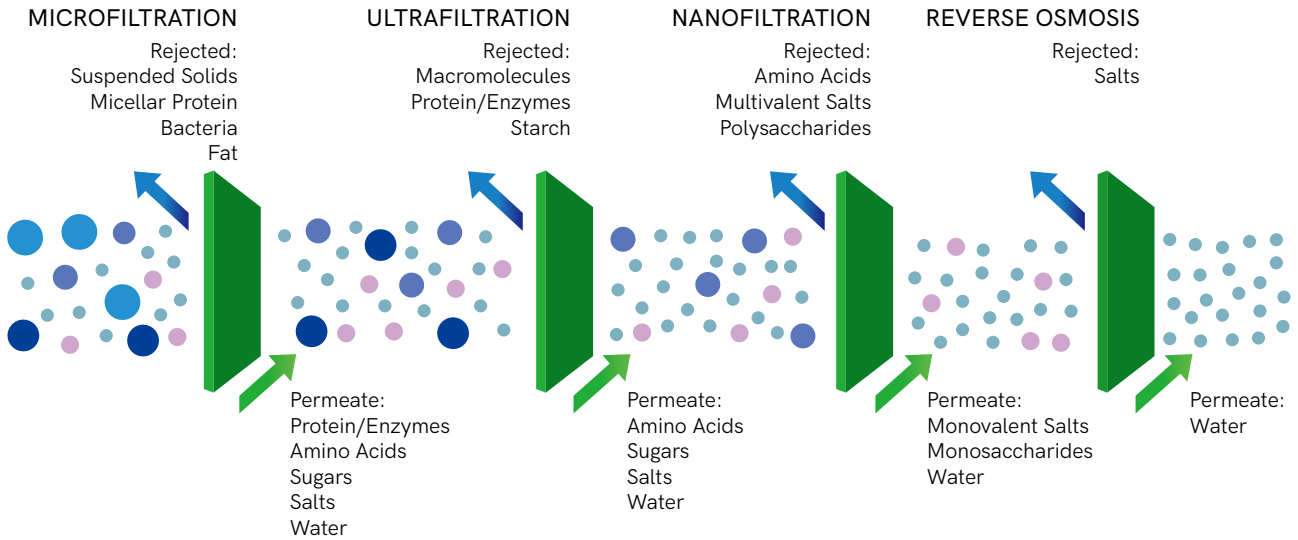

EXAMPLES OF APPLICATIONS

E-coat	Standardization of milk	Cream cheese production
Concentration of protein and gelatin	Whey concentration processing	Clarification of cheese brine
Enzymes, fermentation broths	Clarification of soy sauce	Acid recovery
Caustic recovery	Industrial water	Oil / Water emulsions



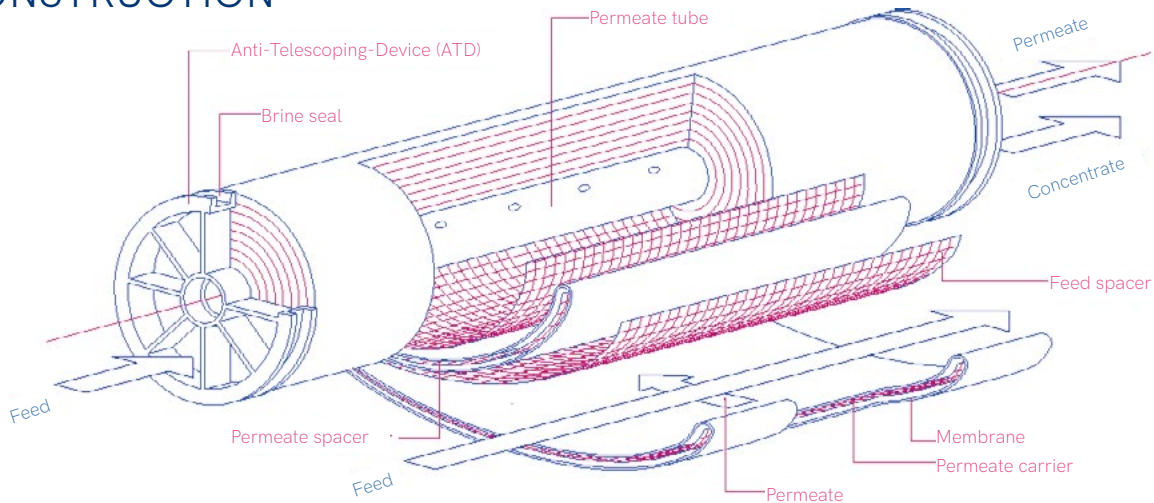


SPIRAL WOUND ELEMENT CONSTRUCTION



PRODUCT CODES FOR SPIRAL WOUND ELEMENTS

SN	UPS010	8038	C
Design / Application	Membrane Type / MWCO	Diameter / Length	Feed spacer
<p>SN Sanitary Design</p> <p>SH Sanitary + High °C</p> <p>ID Industrial Design</p> <p>EC Electro Coating</p> <p>PD Pharmaceutical Design</p> <p>FG Fiberglass</p> <p>CR Caustic Resistant</p> <p>AR Acid Resistant</p> <p>HP High Pressure Resistant</p> <p>TR Temperature Resistant</p> <hr/> <p>Here Sanitary Design</p>	<p>Membrane Materials</p> <p>UPS Polyethersulfone</p> <p>USP Polysulfone</p> <p>UPV Polyvinylidene Flouride</p> <p>MPV Polyvinylidene Flouride</p> <p>NFDK/NFDL Piperazinamide</p> <p>SW3013 Polyamide</p> <hr/> <p>Here Polyethersulfone MWCO 10kDa</p>	<p>Standard Dimensions</p> <p>2540</p> <p>3838</p> <p>4040</p> <p>4333</p> <p>6338</p> <p>8038</p> <p>8040</p> <p>8338</p> <hr/> <p>Here Diameter 8.0inch Length 38inch</p>	<p>Standard Feed Spacers</p> <p>A 34mil (parallel)</p> <p>B 31mil (diamond)</p> <p>C 46mil (diamond)</p> <p>D 51mil (parallel)</p> <p>E 65mil (diamond)</p> <p>F 80mil (diamond)</p> <p>G 80mil (parallel)</p> <p>H 60mil (parallel)</p> <p>J 28mil (diamond)</p> <p>M 34mil (diamond)</p> <hr/> <p>1 mil = 0.001 inch 1 mil = 0.0254 mm</p> <hr/> <p>Here 46mil diamond</p>

ADVANTAGES

 <p>FDA Compliant Materials</p>	 <p>Wide range of membrane types</p>	 <p>High temperature resistance</p>
<p>pH</p> <p>High pH, solvent resistance</p>	 <p>Great mechanical strength</p>	 <p>Customization</p>

OPERATING CONDITION FOR SPIRAL WOUND ELEMENTS

Type	SN/ID/PD	SH	FG	EC	CR	AR	HP	TR
Max. operating pressure loss (bar)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Max. operating pressure loss (psi)	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5
Max. Temperature (°C)	50	80	50	50	50	50	50	80
Max. Temperature (°F)	122	176	122	122	122	122	122	176
pH range during filtration	2-10	2-11	2-11	2-10	3-13	1-12	2-11	2-10
Outer wrap	Net Wrap	Net Wrap	FRP	Net Wrap	FRP	FRP	FRP	FRP

WE SUPPORT YOU - WORLDWIDE!



China

UNISOL Membrane Technology (Xiamen) Co., Ltd.
#1670, Butang Mid Rd, Tong'an District, Xiamen
361112, China
+86 592 6301318
infochina@unisol-global.com

Germany

WTA UNISOL GmbH
Fritz-Bothmann-Str. 1, 99867 Gotha,
Germany
+49 3621 73 77 920
info@wta-unisol.com

USA

UNISOL LLC
108 W. 13th street suite 100, WILMINGTON,
Delaware 19801, USA
+1 786 716 3204
infousa@unisol-global.com

India

Mumbai, India
+91 98330 90670, +91 98201 89128
infoindia@unisol-global.com

Singapore

Singapore
+65 91822555
infosg@unisol-global.com

Vietnam

198 N7 Street, Dong Tang Long, Truong
Thanh ward, Thu Duc, Ho Chi Minh City,
Vietnam
+84 983 537 155
infovn@unisol-global.com



UNISOL MEMBRANE TECHNOLOGY reserves the right to change specifications without prior notification.
For the latest version, please refer to the internet. info@unisol-global.com
www.unisol-global.com | www.wta-unisol.com

12/2024